


LARGE - 60M/120M LENGTHS

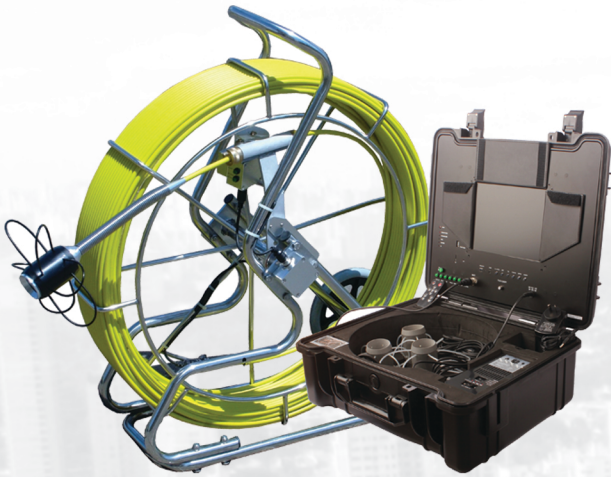

INSPECTION CAMERA KIT 52mm

60M PRICE **\$7300** INC GST

120M PRICE **\$8000** INC GST

USED IN PIPE DIAMETERS
60MM TO 600MM

OPTIONAL ACCESSORIES

52mm HD Camera Head W/Sonde

52mm HD Camera has self leveling head with built in transmitter 512hz (Sonde) for use with locating equipment. Constructed from aircraft aluminum.



Price \$1400 Inc GST

Patch Cables for use with all units

Available in three lengths. 2M, 3M and 5M. Great for having the monitor unit in a van /truck while the operator is doing the inspection.



Price \$40 - \$80 Inc GST

52mm Pipe Camera Skids

Newly designed skids with rollers for our 52mm camera range. Makes pushing through debris much easier. Kit has three sizes included.



Price \$200 Inc GST

Pipe Inspection locator

Our Analogue locators are great for septic tank locating and various other uses where you need to located the camera head. Can be with all of our pipe inspection cameras with built-in Sondes (transmitters).



Price \$1500 Inc GST

MONITORS CAN BE USED WITH ALL OF OUR SMALL, MEDIUM AND LARGE CAMERA REELS

SPECIFICATIONS

Probe :

- Length: 120 meter (394') or 60 meter (196') long flexible probe
- Diameter: 52mm (2")
- Self leveling camera unit, with Sapphire lens
- No articulation
- Fiberglass cable
- 60° Field of View (FOV)
- Waterproof design for portable use
- 18 LED lights to illuminate the inspection area

Image Hub :

- 10" Colour LCD monitor with Video output, file playback
- USB port to capture video to a flash drive, or hard drive
- Recording format - AVI
- IR remote control
- Power adaptor: 110~240VAC, 12VDC/1800mA
- Rechargeable battery for portable use up to 3.5 hours
- Li-ion battery box (4400mAh)
- System Operating Temperature: -20°to 120°F
- Operating temperature - 20°F~ 120°F (- 28C°~ 50°C)

Please note: We can make this unit with a 512 Hz sonde (transmitter) built into the camera head for an additional cost of \$850 Inc GST.

PICTURES TAKEN WITH 22mm HD CAMERA

100mm PIPE



40mm PIPE



\$2400.00 AUD Inc GST

Inspection Camera Kit 22mm 20M

Camera Specifications:

- 700 TV line resolution colour Sony Super Had CCD
- Sapphire glass lens cover
- 60° camera viewing angle
- Camera diameter 12mm
- 4 Bar pressure rating

Cable Wheel:

- Stainless Steel wheel with special structure for connection to monitor
- 20m fibreglass rod cable
- Gold touch-point connector to camera
- 33cm wheel diameter



\$2700.00 AUD Inc GST

Inspection Camera Kit 22mm 40M

Camera Specifications:

- 700 TV line resolution colour Sony Super Had CCD
- Sapphire glass lens cover
- 60° camera viewing angle
- Camera diameter 6mm
- 4 Bar pressure rating

Cable Wheel:

- Stainless Steel wheel with special structure for connection to monitor
- 40m fibreglass rod cable
- Gold touch-point connector to camera
- 33cm wheel diameter



40m Price:

\$2700.00 AUD Inc GST

20m Price:

\$2400.00 AUD Inc GST

Inspection Camera Kit 22mm 20M/40M

Probe:

- 700 TV line resolution colour Sony Super Had CCD
- Sapphire glass lens cover
- 60° camera viewing angle
- Camera diameter 12mm
- 4 Bar pressure rating

Cable Wheel:

- Stainless Steel wheel with special structure for connection to monitor
- 20m/40m fibreglass rod cable
- Gold touch-point connector to camera
- 33cm wheel diameter



\$8000.00 AUD Inc GST

Pipe Inspection Camera Kit 52mm 120M

Probe:

- Length: 120 meter (394') long flexible probe
- Diameter: 52mm (2")
- Self leveling camera unit, with Sapphire lens
- No articulation
- Fiberglass cable
- 60° Field of View (FOV)
- Waterproof design for portable use
- 18 LED lights to illuminate the inspection area

Image Hub:

- 10" Colour LCD monitor with Video output, file playback
- USB port to capture video to a flash drive, or hard drive
- Recording format - AVI
- IR remote control
- Power adaptor: 110~240VAC, 12VDC/1800mA
- Rechargeable battery for portable use up to 3.5 hours
- Li-ion battery box (4400mAh)
- System Operating Temperature: -20°F to 120°F
- Operating temperature - 20°F ~ 120°F (- 28°C ~ 50°C)



\$7300.00 AUD Inc GST

Pipe Inspection Camera Kit 52mm 60M

Probe:

- Length: 60 meter (196') long flexible probe
- Camera Diameter: 52mm (2")
- Self leveling camera unit, with Sapphire lens
- No articulation
- Fiberglass cable
- 60° Field of View (FOV)
- Waterproof design for portable use
- 18 LED lights to illuminate the inspection area

Image Hub:

- 10" Colour LCD monitor with Video output, file playback
- USB port to capture video to a flash drive, or hard drive
- Recording format - AVI
- IR remote control
- Power adaptor: 110~240VAC, 12VDC/1800mA
- Rechargeable battery for portable use up to 3.5 hours
- Li-ion battery box (4400mAh)
- System Operating Temperature: -20°F to 120°F
- Operating temperature - 20°F ~ 120°F (- 28°C ~ 50°C)



\$11999.00 AUD Inc GST

Pipe Inspection Camera Kit Pan And Tilt 120M

Probe:

- Sony HD Image sensor 700TVL
- Length: 120 metre long flexible fiberglass push rod with pressure rating of 2 Bar.
- Diameter of camera head: 50mm
- Length of camera head: 150mm
- Remotely Pan 360 degrees, Tilt 180 degrees
- Fiberglass push rod 10mm in diameter
- Field of view 120 degrees

Image Hub:

- 8" Colour LCD monitor with Video output, file playback
- USB port to capture video to a flash drive.
- Recording format - MEG4
- IR remote control
- Power adaptor: 110~240VAC, 12VDC/1800mA
- Rechargeable battery for portable use up to 4 hours
- Li-ion battery box (8800mAh)
- Operating temperature - 20°F ~ 120°F (- 28°C ~ 50°C)




Address:

296 North East Rd Klemzig
South Australia, 5087

E-mail: sales@camtek.net.au

Phone: 08 8122 0469

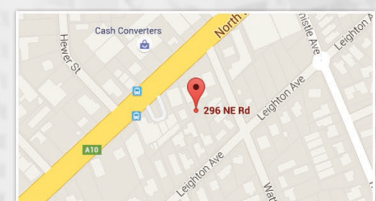

ORDER ONLINE @ WWW.CAMTEK.NET.AU OR CALL 08 8122 0469