

SMALL - 20M/40M LENGTHS



INSPECTION CAMERA KIT 22mm

20M PRICE **\$2400** INC GST

40M PRICE **\$2700** INC GST

USED IN PIPE DIAMETERS
25MM TO 100MM

OPTIONAL ACCESSORIES

22mm HD Camera head with Sonde

22mm HD Camera has built in transmitter 512hz (Sonde) for use with locating equipment. Constructed from stainless steel for a more reliable, robust camera.



Price \$650 Inc GST

29mm Self leveling HD Camera

29mm Self leveling HD camera head can be used with any of our 20M and 40M range.



Price \$850 Inc GST

22mm Pipe Camera skids

Newly designed skids for our 22mm camera range. Makes pushing through debris much easier. Kit has three sizes included.



Price \$150 Inc GST

Pipe Inspection locator

Our Analogue locators are great for septic tank locating and various other uses where you need to located the camera head. Can be with all of our pipe inspection cameras with built-in Sondes (transmitters).



Price \$1500 Inc GST

MONITORS CAN BE USED WITH ALL OF OUR SMALL, MEDIUM AND LARGE CAMERA REELS

SPECIFICATIONS

Camera :

- 700 TV line resolution colour Sony Super Had CCD
- Sapphire glass lens cover
- 60° camera viewing angle
- Camera diameter 22mm (35mm including foam cover)
- 12 Individual White LED's (intensity can be controlled from monitor)
- 20cm total length including spring and connector
- 4 Bar pressure rating
- Newly design camera skids to keep the camera head central while using in pipe

Monitor :

- We have also incorporated a 10" wide LCD screen for easier viewing
- Push button recording
- Push button audio (with LED for on/off indication)
- Re-developed DVR software which makes the unit record video, audio and snapshots (pictures)
- USB flash drive slot and micro sd slot for removable storage

Cable Wheel :

- Stainless Steel wheel with special structure for connection to monitor
- 20m fibreglass rod cable
- Gold touch-point connector to camera
- 13cm rubber covered handle
- 33cm wheel diameter

PICTURES TAKEN WITH 22mm HD CAMERA

100mm PIPE



40mm PIPE



Inspection Camera Kit 22mm 20M



\$2400.00 AUD Inc GST

Camera Specifications:

- 700 TV line resolution colour Sony Super Had CCD
- Sapphire glass lens cover
- 60° camera viewing angle
- Camera diameter 12mm
- 4 Bar pressure rating

Cable Wheel:

- Stainless Steel wheel with special structure for connection to monitor
- 20m fibreglass rod cable
- Gold touch-point connector to camera
- 33cm wheel diameter

Inspection Camera Kit 22mm 40M



\$2700.00 AUD Inc GST

Camera Specifications:

- 700 TV line resolution colour Sony Super Had CCD
- Sapphire glass lens cover
- 60° camera viewing angle
- Camera diameter 6mm
- 4 Bar pressure rating

Cable Wheel:

- Stainless Steel wheel with special structure for connection to monitor
- 40m fibreglass rod cable
- Gold touch-point connector to camera
- 33cm wheel diameter

Inspection Camera Kit 22mm 20M/40M



40m Price:

\$2700.00 AUD Inc GST

20m Price:

\$2400.00 AUD Inc GST

Probe:

- 700 TV line resolution colour Sony Super Had CCD
- Sapphire glass lens cover
- 60° camera viewing angle
- Camera diameter 12mm
- 4 Bar pressure rating

Cable Wheel:

- Stainless Steel wheel with special structure for connection to monitor
- 20m/40m fibreglass rod cable
- Gold touch-point connector to camera
- 33cm wheel diameter

Pipe Inspection Camera Kit 52mm 120M



\$8000.00 AUD Inc GST

Probe:

- Length: 120 meter (394') long flexible probe
- Diameter: 52mm (2")
- Self leveling camera unit, with Sapphire lens
- No articulation
- Fiberglass cable
- 60° Field of View (FOV)
- Waterproof design for portable use
- 18 LED lights to illuminate the inspection area

Image Hub:

- 10" Colour LCD monitor with Video output, file playback
- USB port to capture video to a flash drive, or hard drive
- Recording format - AVI
- IR remote control
- Power adaptor: 110~240VAC, 12VDC/1800mA
- Rechargeable battery for portable use up to 3.5 hours
- Li-ion battery box (4400mAh)
- System Operating Temperature: -20°F to 120°F
- Operating temperature - 20°F ~ 120°F (- 28°C ~ 50°C)

Pipe Inspection Camera Kit 52mm 60M



\$7300.00 AUD Inc GST

Probe:

- Length: 60 meter (196') long flexible probe
- Camera Diameter: 52mm (2")
- Self leveling camera unit, with Sapphire lens
- No articulation
- Fiberglass cable
- 60° Field of View (FOV)
- Waterproof design for portable use
- 18 LED lights to illuminate the inspection area

Image Hub:

- 10" Colour LCD monitor with Video output, file playback
- USB port to capture video to a flash drive, or hard drive
- Recording format - AVI
- IR remote control
- Power adaptor: 110~240VAC, 12VDC/1800mA
- Rechargeable battery for portable use up to 3.5 hours
- Li-ion battery box (4400mAh)
- System Operating Temperature: -20°F to 120°F
- Operating temperature - 20°F ~ 120°F (- 28°C ~ 50°C)

Pipe Inspection Camera Kit Pan And Tilt 120M



\$11999.00 AUD Inc GST

Probe:

- Sony HD Image sensor 700TVL
- Length: 120 metre long flexible fiberglass push rod with pressure rating of 2 Bar.
- Diameter of camera head: 50mm
- Length of camera head: 150mm
- Remotely Pan 360 degrees, Tilt 180 degrees
- Fiberglass push rod 10mm in diameter
- Field of view 120 degrees

Image Hub:

- 8" Colour LCD monitor with Video output, file playback
- USB port to capture video to a flash drive.
- Recording format - MEG4
- IR remote control
- Power adaptor: 110~240VAC, 12VDC/1800mA
- Rechargeable battery for portable use up to 4 hours
- Li-ion battery box (8800mAh)
- Operating temperature - 20°F ~ 120°F (- 28°C ~ 50°C)




CAMTEK
SURVEILLANCE PRODUCTS
For all your surveillance needs

Address:

296 North East Rd Klemzig
South Australia, 5087

E-mail: sales@camtek.net.au

Phone: 08 8122 0469

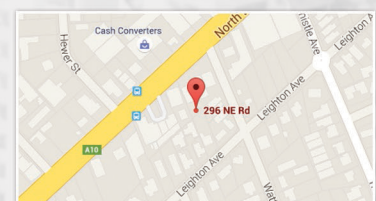

ORDER ONLINE @ WWW.CAMTEK.NET.AU OR CALL 08 8122 0469